

An Australian Government Initiative


Groundwater Education Investment Fund Project

Borehole Infrastructure Report

Borehole Type	Piezometer	GPS Easting	(MGA-94	328254	
Unique Well ID	18602	GPS Northing	Zone 53)	7527863	
Completion Date	13 May 2011	Location		Pine Hill Station, NT	
Drilled By	NRETAS	Installed By		NRETAS	
Monument Type	Round-White-Swing Top	Depth Drilled		12.0 m	
Monument Diameter/Width	216 mm	Drilled Diameter/Method		200 mm (min), Rotary Air	
Development Details	Completed in the unsaturated zone, no airlift.				

Project Comments: 18602 is located approximately 300 m east of the Woodforde River channel, Ti Tree Basin, NT.

Bore ID	Casing Size (mm)/ Type	TOC (mAHD)	Casing (mBC	-	Screen Size (mm)/ Aperture (mm)/ Type		nent GL)	De	een pth GL)	SWL (mTOC)
	200/Steel		-0.64	6.0	NA	0.0	6.0	NA	NA	NA
18602	100/PVC12	594.763	-0.6	9.0	100/1/PVC	0.0	4.95	7.0	8.0	Dry

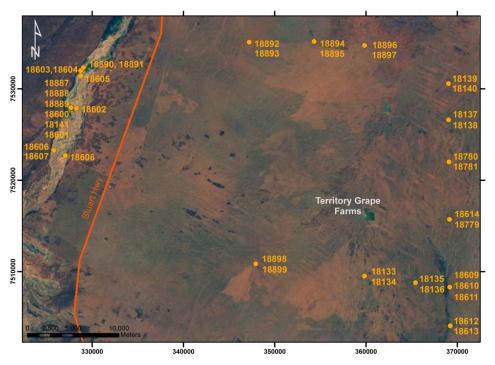


Map of Ti Tree Super Science Piezometer Locations, Pine Hill Station, NT.


Note* Appendix includes Well Completion, Lithology and Geophysical Logs, Hydraulic Test and Chemical Analysis.

Infrastructure Report prepared by:	Contact Details:	Checked by: Prof Peter Cook
Shiller	Stephanie.villeneuve@flinders.edu.au Office: 08 8201 2724	Ret ah

Well Completion Log

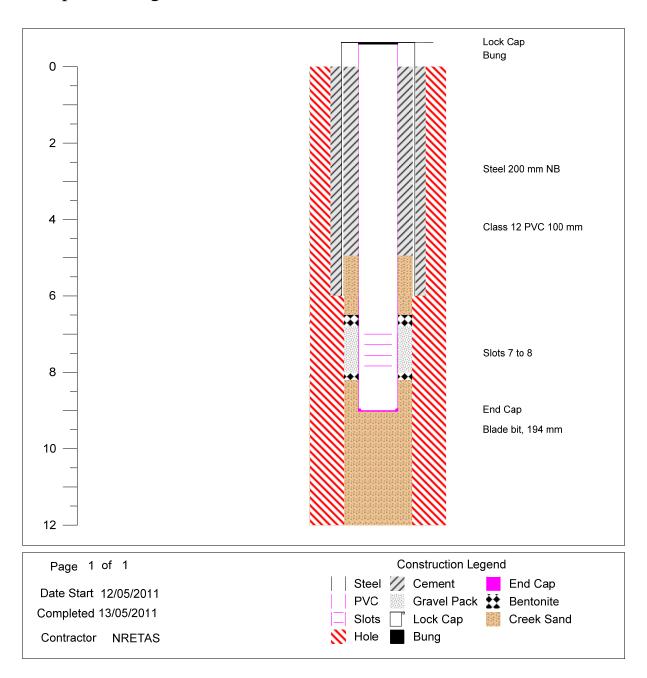


Lithology Log

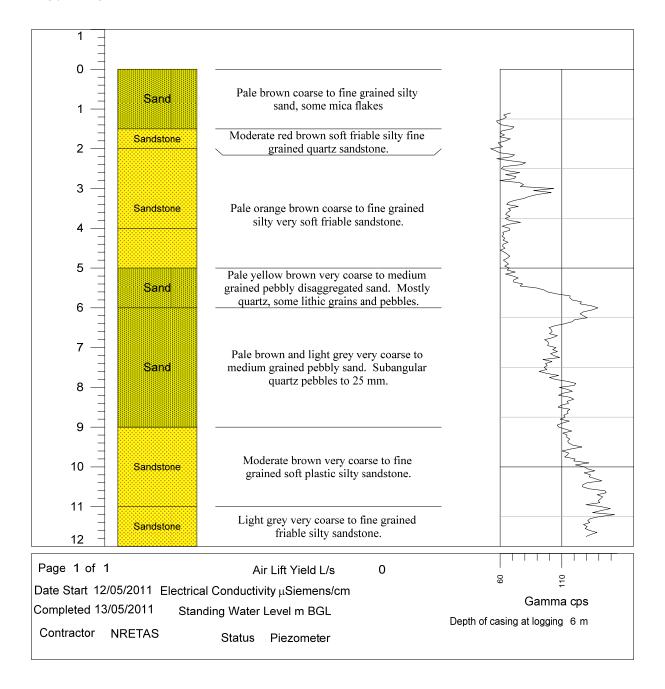

Geophysical Logs

The portable Mount Sopris logging system was used to collect geophysical data from bore 18602. The 2PGS probe was used to collect natural gamma measurements, and the 2PIA probe was used to measure conductivity/induced resistivity.



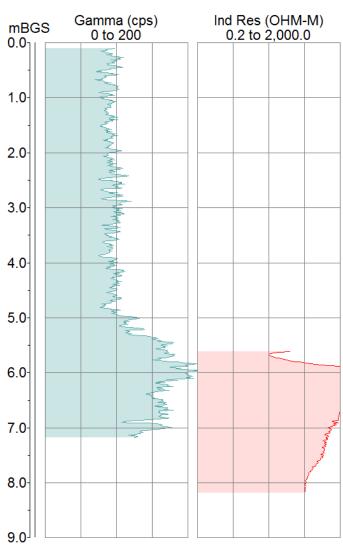

Piezometer 18602 is completed in the unsaturated zone in order to test for an ephemeral perched aquifer. I has been dry during each visit to date. Chemical Analysis				